



GUARDIAN



TL-30 TESTED-FACTORY APPROVED

Six Side Composite Burglary tool Resistant plus Fire Protection

Features

Two hour 350 fire rating. Tested at temp of 1800 °F for a period of 2 hours and inside temp did not exceed 350 °F


Six side protection against concentrated attacks with Mechanical and electric tools

Superior construction quality more costly units at an affordable price

Door at a thickness of 3.54" (90 mm) and body barrier at a thickness of 3.14" (80 mm)

Locks: a UL Group 2 combination lock and a seconded key lock or combination lock

A 3 way active boltwork with a locking mechanism that includes special elements including a glass plate which protect the core against sophisticated drilling from all sides

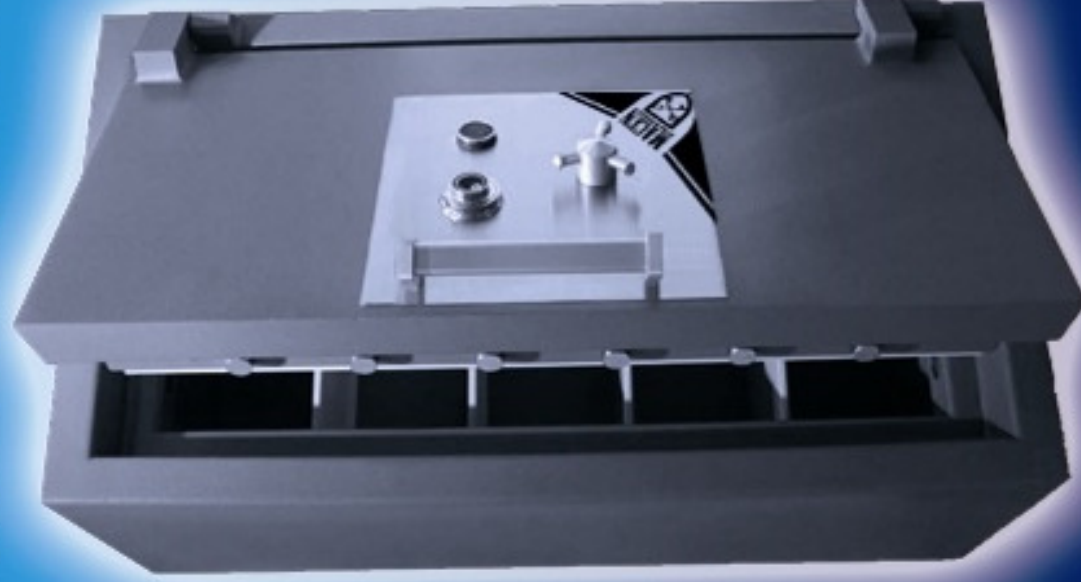

Model	Interior Dimensions in (mm)			Exterior Dimensions in (mm)			Capacity		Weight	
	Height	Width	Depth	Height	Width	Depth	(ft ³)	lbs	(kg)	
GU-251816	25 (635)	18 (457)	16 (406)	31.3 (795)	24.3 (617)	27 (686)	4.2	1183	(538)	
GU-342020	34 (864)	20 (508)	20 (508)	40.3 (1024)	26.3 (668)	31 (787)	7.85	1804	(820)	
GU-452020	45 (1143)	20 (508)	20 (508)	51.3 (1303)	26.3 (668)	31 (787)	10.3	2289	(1040)	
GU-552020	55 (1397)	20 (508)	20 (508)	61.3 (1557)	26.3 (668)	31 (787)	12.6	2681	(1217)	
GU-602020	60 (1524)	20 (508)	20 (508)	66.3 (1684)	26.3 (668)	31 (787)	13.8	2842	(1292)	
GU-652820	65 (1651)	28 (712)	20 (508)	71.3 (1811)	34.3 (871)	31 (787)	21	3650	(1659)	
GU-683626	68 (1727)	36 (915)	26 (660)	74.3 (1877)	42.3 (1074)	37 (940)	36.8	4135	(1879)	

From ISRAEL ... Security is our top priority !!!